

AN-1000X Speaker Monitor

MADE IN USA



SIX YEAR WARRANTY


Technical Specifications

Features

- Reach Crowds of 400+
- 103 dB of Clear Sound
- Bass & Treble Controls
- RCA & 1/4" Line Inputs
- MIC/LINE Configurable XLR Input
- Magnetically Shielded
- 220 Volt CE-Compliant Model
- Durable ABS Case - Black or White
- Speaker Output Drives Companion Speaker



The AN-1000X is the most versatile powered monitor on the market. You can add it to an A/V rack setup, use it as a studio monitor, install it in a trade show booth, or place it in the Captain's quarters on a US Navy warship to monitor activities in the intelligence room.

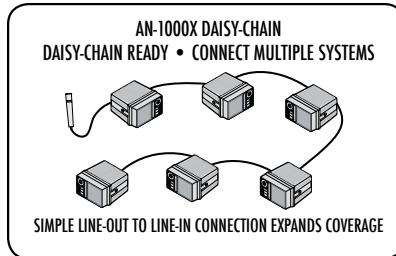

Technical Specifications

Rated Power Output	50 watts continuous @ 4 Ω
Max SPL @ Rated Power	103 dB @ 1 meter
Frequency Response	65 Hz - 20 kHz ± 3 dB
Speaker Type	4.5" woofer, 10 mm dome tweeter
AC Power Reqs.	110 - 125Vac, 50/60 Hz, 90W Max 208 - 240Vac, 50/60 Hz, 90W Max
Dimensions (HWD)	5.25" x 8.4" x 9" (13 x 21 x 23 cm)
Weight	9.5 lbs / 4.3 Kg
Enclosure Material	ABS

Inputs
Balanced

microphone / line configurable, female XLR, switchable phantom power
Hi-Z, unbalanced, 1/4"-phone & RCA

Line

Outputs
Line
Speaker

Lo-Z, RCA, buffer isolated line-level
8 Ω, unswitched, 1/4"-phone



(Features & Specifications Subject To Change Without Notice)


AN-1000X MODELS

AN-1000X	Powered monitor speaker
AN-1001X	Unpowered Companion Speaker
ANX-70	Internal 70 volt transformer

ACCESSORIES

MIC-90	Professional dynamic, cardioid pattern handheld microphone
SC-50	50' Speaker cable
CC-100	Speaker/accessory bag
CC-100XL	Speaker/accessory bag - large
HC-1550	Custom traveling hard case
CC-550	Speaker stand/accessory bag
SS-250	Speaker stand
MSB-201	Microphone stand with boom
SB-1	Stand mount
SB-3	Ceiling mount bracket*
SB-360	360° swivel wall bracket*

* Available with black or white finish

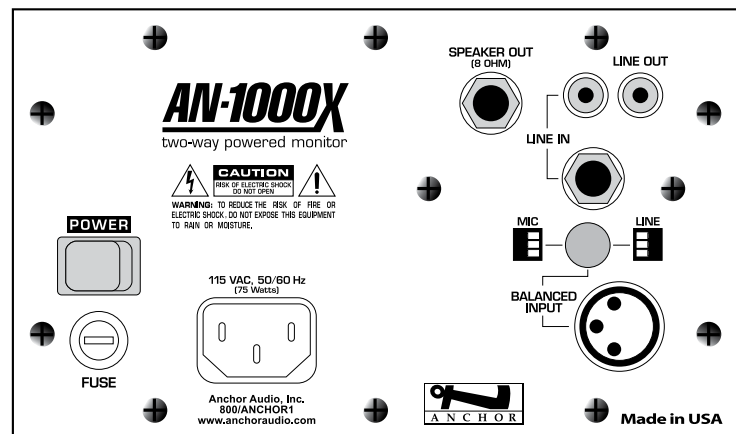

(AN-1000X Back Panel Shown)

Anchor Audio, Inc.
Portable Sound Systems • Carlsbad, California

800.262.4671

www.anchoraudio.com

S-ANX/1108